


PowerWAVE 5000/TP (10–50 kVA)

Technical Specification

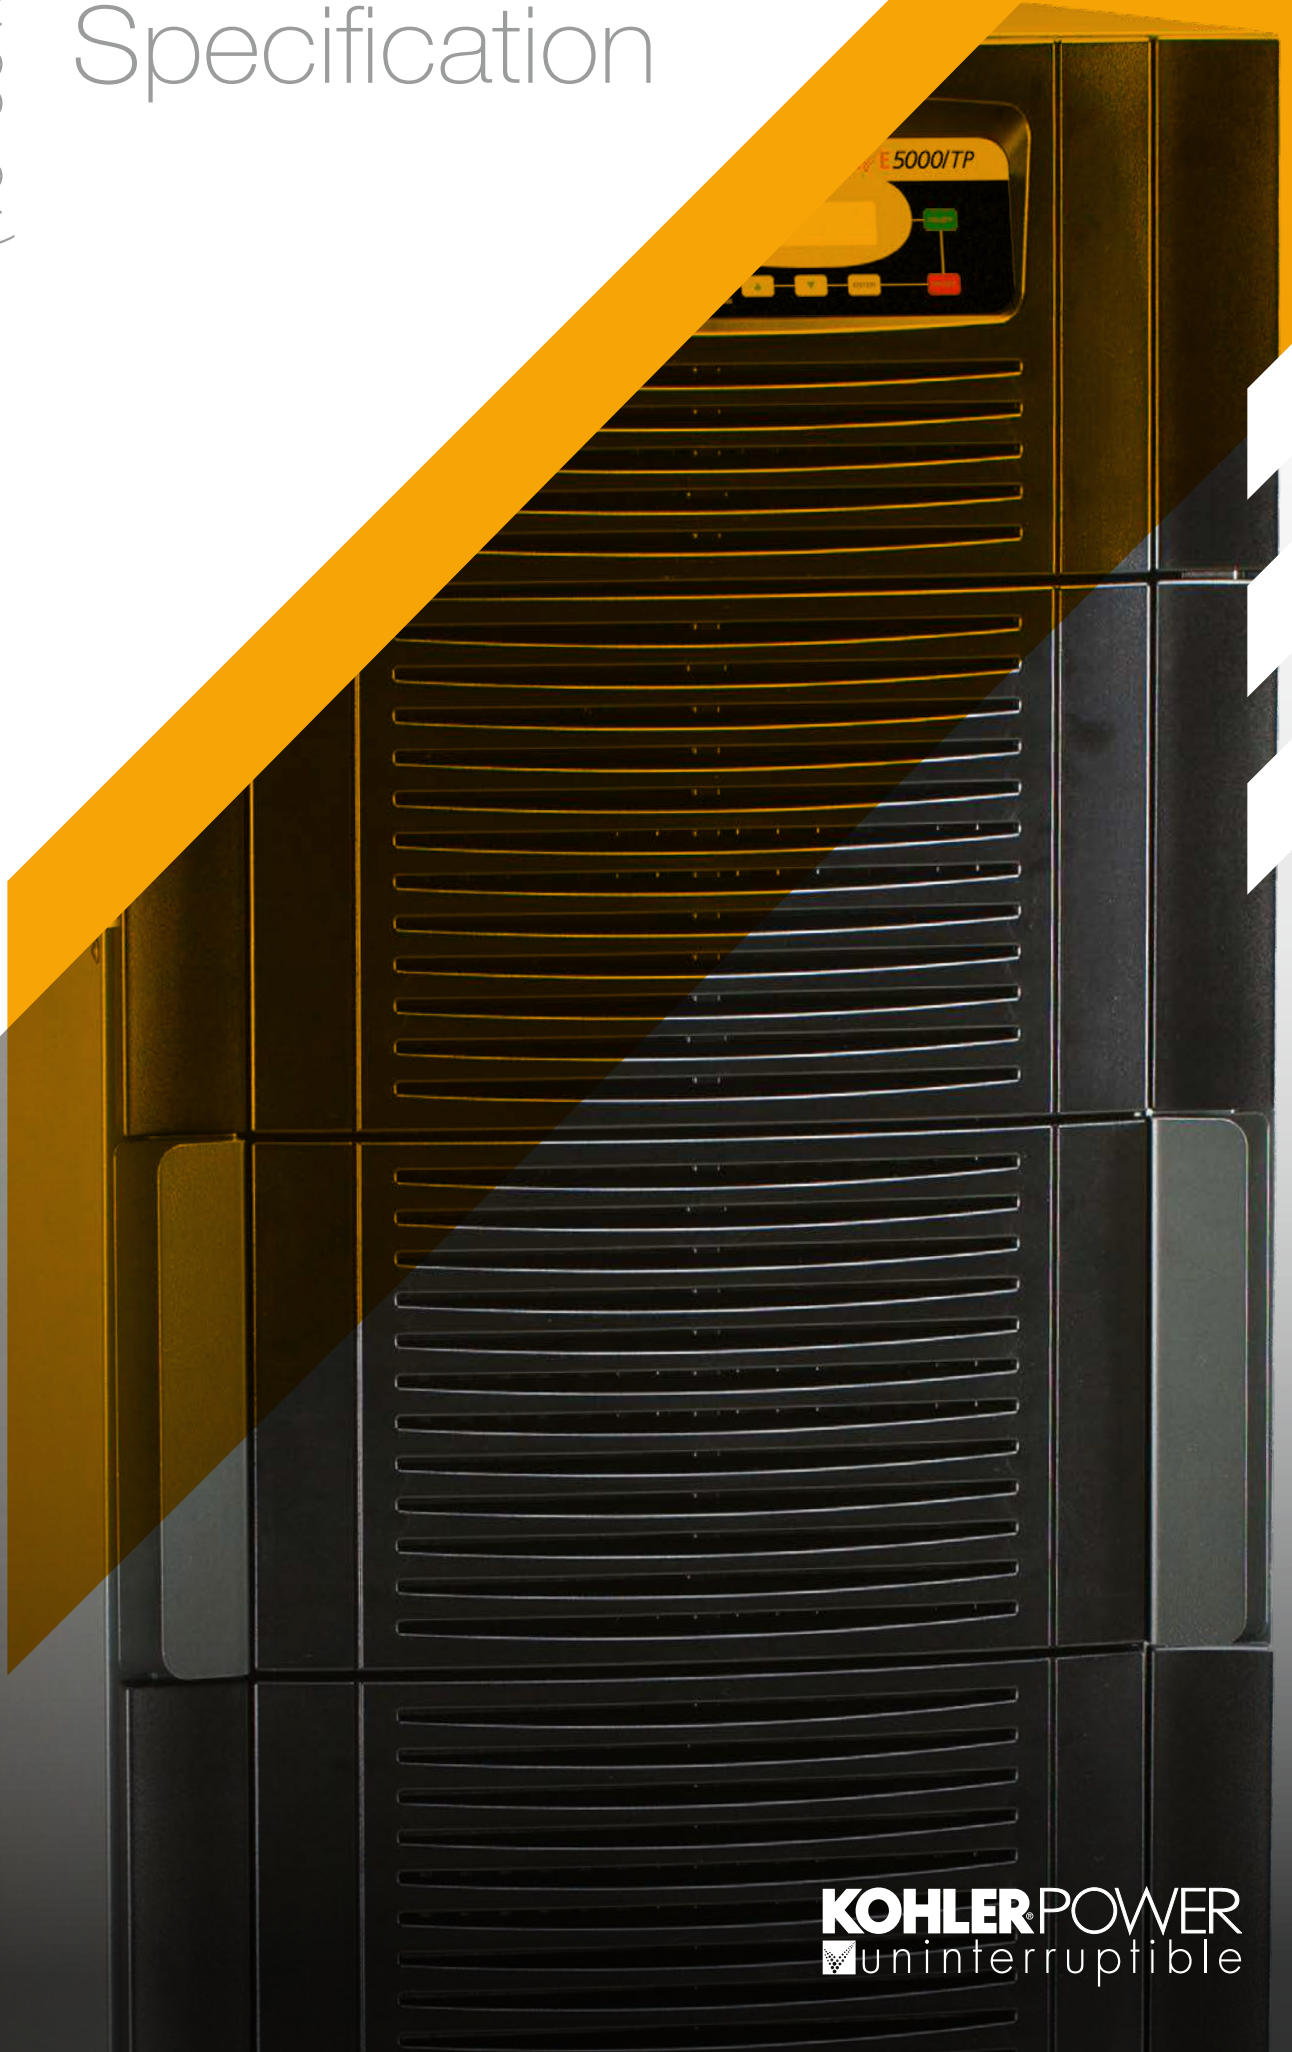

PowerWAVE 5000/TP

General data	10 kVA	15 kVA	20 kVA	25 kVA	30 kVA	40 kVA	50 kVA
Topology	True online double conversion						
Parallel configuration	Up to 20 units						
Integral batteries	Yes						
Input							
Nominal input voltage	3 x 380 / 220 V + N, 3 x 400 V / 230 V + N, 3 x 415 / 240 V + N						
Voltage tolerance	(-23%/+15%) 3 x 308/177 V to 3 x 460/264 V for <100% load						
Input distortion THDi	3.0% @ 100% load						
Frequency range	35–70 Hz						
Power factor	0.99 @ 100% load						
Output							
Output rated power	9 kW	13.5 kW	18 kW	22.5 kW	27 kW	36 kW	45 kW
Output power factor	0.9						
Rated output voltage	3 x 380 / 220 V + N, 3 x 400 / 230 V + N, 3 x 415 / 240 V + N						
Voltage tolerance	1% static, 4% dynamic						
Voltage distortion	< 2% with linear load, < 4% with non-linear load						
Overload capability (0.9 p.f)	10 min: 110% load, 1 min: 130% load						
Nominal frequency	50 or 60 Hz						
Crest factor	3:1						
Efficiency							
Overall efficiency	Up to 95.5%						
In eco mode configuration	Up to 98%						
Environment							
Protection rating	IP 20 (IP 21 option)						
Operating temperature	0°C–40°C						
Positional clearances	Front: 900 mm minimum						
	Left: 600 mm minimum						
	Right: 600 mm minimum						
	Rear: 200 mm minimum for cooling, 600 mm minimum for service						
Input & output power cabling accessibility	Cabled at the rear (A and B cabinets only)				–		
	–			Cabled at the front (C cabinets only)			
Relative air humidity	Up to 95% (non condensing)						
Batteries							
Min/max number of 12V blocks per string	22–50	32–50	32–50	40–50	24–50	32–50	40–50
Charging current	4 A				6 A		
Battery type	Maintenance free VRLA or NiCd						
Standards							
Safety	IEC/EN 62040-1-1:2003, IEC/EN 60950-1:2001/A11:2004						
EMC	IEC/EN 62040-2:2005, IEC/EN61000-3-2:2000, IEC/EN61000-6-2:2001						
Performance	IEC/EN62040-3:2001						



INVESTORS
IN PEOPLE

Accredited
Until 2021



Constructionline
Gold Member



Accredited Contractor
CHAS.co.uk

KOHLER POWER
uninterruptible

Woodgate, Bartley Wood Business Park,
Hook, Hampshire RG27 9XA

Tel: 01256 386700

Fax: 01256 386701

Email: uksales.ups@kohler.com

www.kohler-ups.co.uk